

Features

- 25 mton winch, fitted in hoisting frame
- Bumpless shifting between CT and normal operation
- Provided with rotational pulsepickup to obtain wire length measurement

- Fail band brake ensures safe operation
- Both local and remote operation
- Recommended CT maximum is approx. 50% of max. line pull

Benefits

24/7 (de)mobilisation,24/7 installation and commissioning



Guaranteed flexibility and high availability




Maintenance during the project



Clear budget and manageable costs

Specifications HW25CT

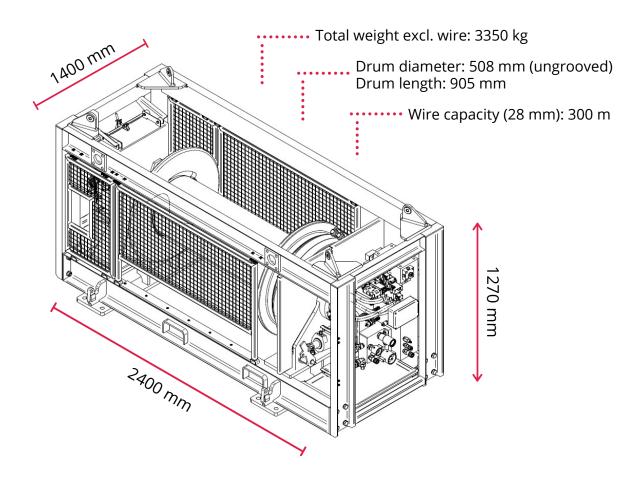

Max. line pull first layer	25 mton
Max. brake holding capacity	35 mton (first layer)
Max. speed first layer	10 m/min @ 100 l/min
Hydraulic supply	100 l/min / 300 bar
Pressure (P)	SAE 1 1/2" - 6000# (38S)
Return oil (T)	SAE 1 1/2" - 3000# (42L)
Flush (FL)	16S
Drain (D)	28L
Power supply nominal	230 VAC 50Hz - 6A
Power receptacle	16 A, IEC 60309