

Features

- 80 mton winch
- DNV 2.7-3 certified spreader bar with slings and shackles
- Driven by four high torquehydraulic motors through pinion/gear transmission

- Hydraulic valve block ensures safe operation
- Offshore certified lifing lugs acc. DNV 2.7-3 and EN 12079
- Each hydraulic motor is
- equipped with displacement shift

Benefits

24/7 (de)mobilisation, 24/7 installation and commissioning



Guaranteed flexibility and high availability




Maintenance during the project



Clear budget and manageable costs

Specifications HW80 S

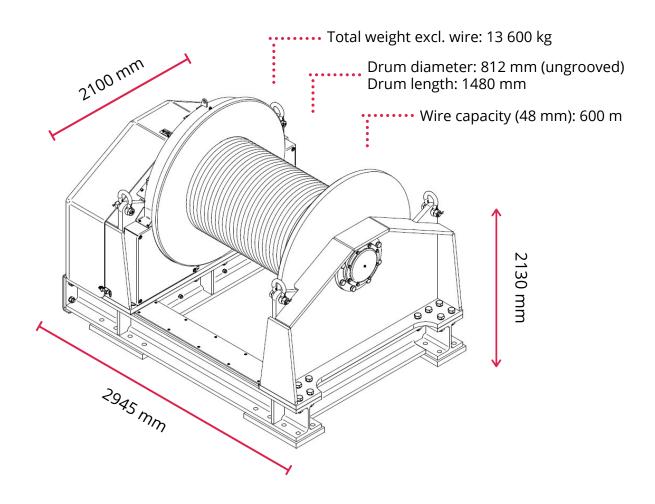

Max. line pull @ low speed	80 mton
Max. line pull @ high speed	32 mton
Max. brake holding capacity	100 mton
Max. line speed @ max. pull	8 m/min
Max. line speed @ high speed	20 m/min
Hydraulic supply	300 l/min @ 300 bar
Max. hydraulic pressure	350 bar
Max. wire diameter	48 mm
Pressure (P)	30 S
Return oil (T)	42 L
Drain (D)	28 L
Drain (Y)	22 L
Pilot (X)	16 S
Flush (F)	25 S
Load sense (LS)	12 L
Power supply nominal	24 VDC, 10 A
Power receptacle	Marechal DSN24, male, 23P + E