



HydrauPack 45

Features

- Horsepower compensation
- Open hydraulic circuit with pressure and load sense control
- Flushing connection for separate low pressure flushing
- Including certified shackles
- Integrated hydraulic oil circulation cooler
- Combinable with one or more HP 35 units for higher output flow

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project





Guaranteed flexibility and high availability



Clear budget and manageable costs

Specifications HP45

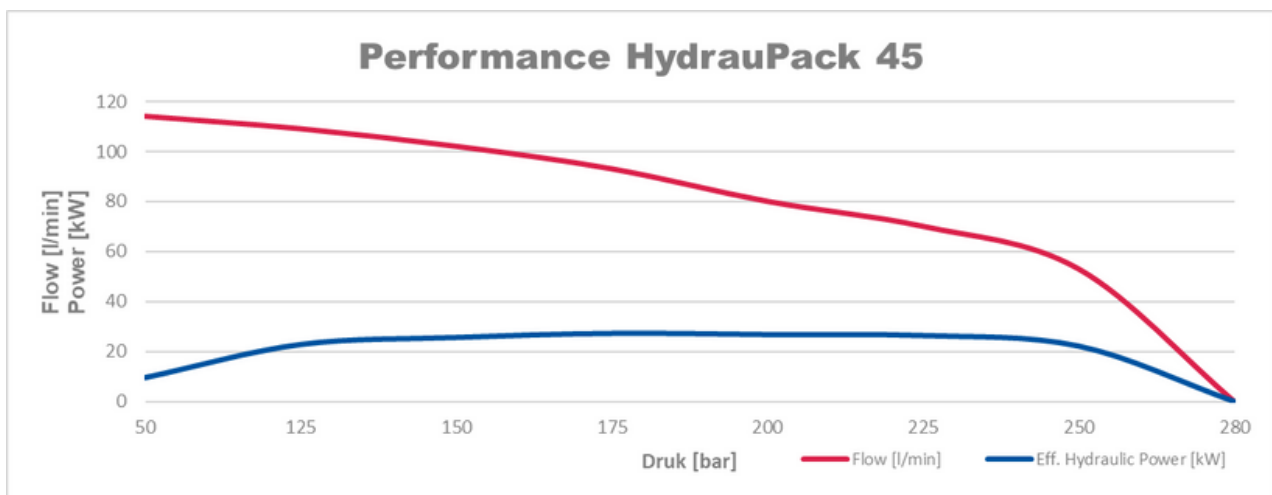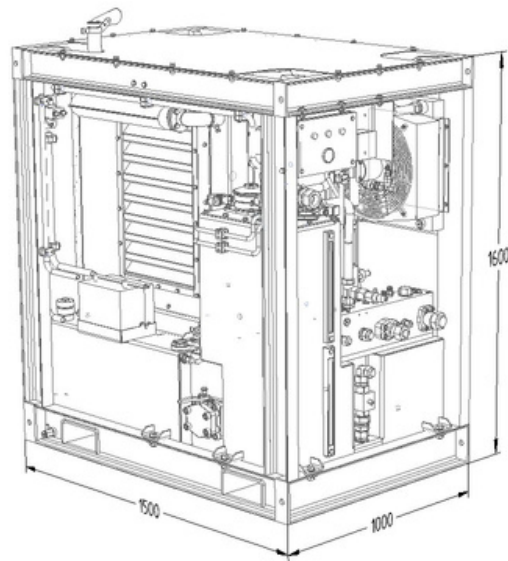

Specifications		
Total weight excl./incl. oil	1300 / 1725	kg
Hydraulic oil tank capacity	230	liter
Fuel tank capacity	240	liter
Operational temperature	-15 to +38	°C
Technical specifications		
Max. working pressure	300	bar
Max. output flow	120	liter/min @ 3000 rpm
Total engine power	45	kW (25 °C)
Pressure (P)	30 S	
Return (T)	42 L	
Leak	28 L	
Load sense	12 S	
Flush	16 S	
Tank drain	28 L	