



# HydrauWinch 30 CT

## Features

- 30 mton tugger winch
- Load is measured by 4 load pins in base of the frame
- Offshore certified lifting points acc. DNV 2.7-3 rules
- Bumpless shifting between CT and normal operation
- Provided with rotational pulse pickup to obtain wire length measurement
- Fail safe disc brake ensures safe operation and assures accurate measurement

## Benefits

**24/7**

24/7 (de)mobilisation, installation and commissioning



Guaranteed flexibility and high availability




Maintenance during the project



Clear budget and manageable costs

## Specifications HW30CT

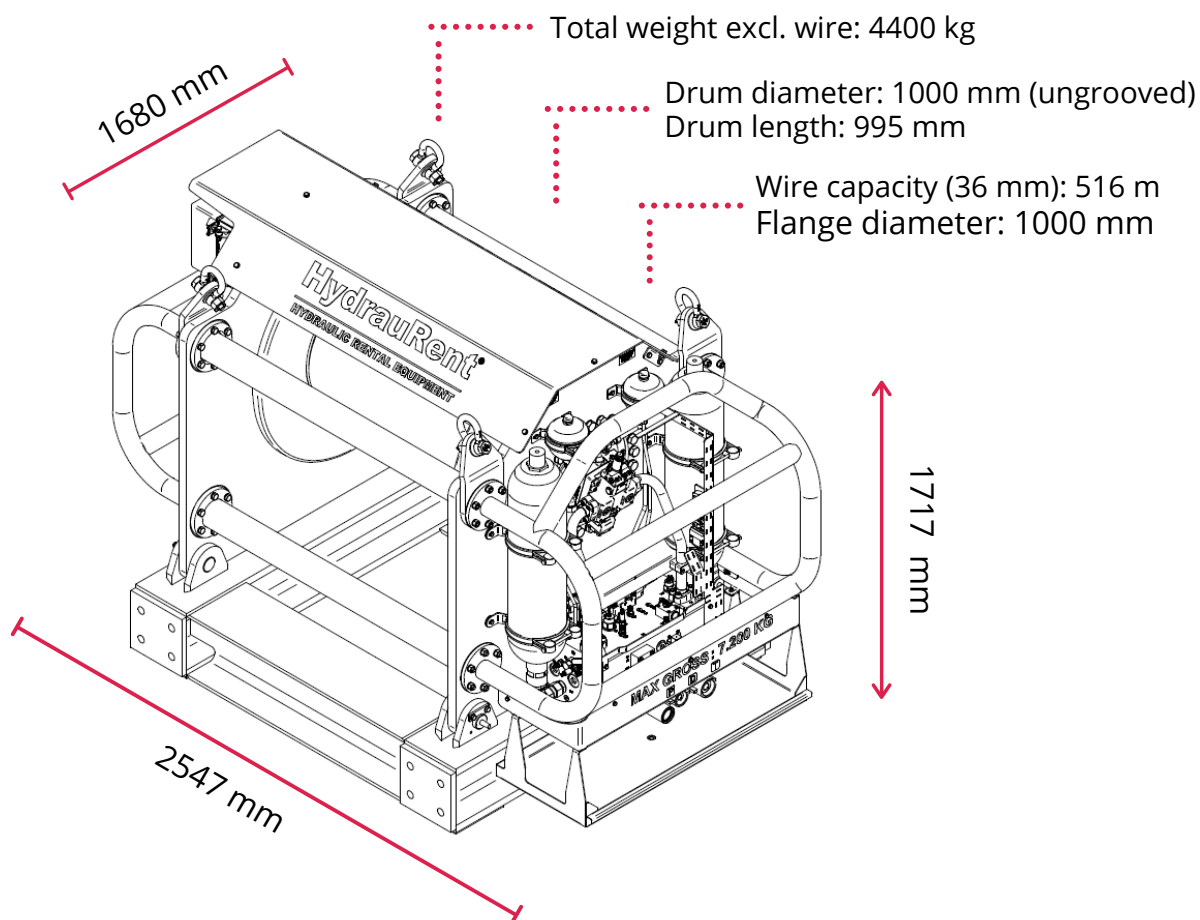

Max. line pull first layer	325 kN @ 350 bar
Nominal line pull first layer	300 kN @ 325 bar
Max. brake holding capacity	345 kN (first layer)
Max. speed first layer	21 m/min @ max. line pull
Hydraulic supply	250 l/min / 350 bar
Max. wire diameter	40 mm (not included)
Nominal wire diameter	36 mm (not included)
Pressure (P)	Quick connector Nipple VOF 114 1 1/4" BSP N 811200004
Return oil (T)	Quick connector Coupler VOF 114 1 1/4" BSP C 811200005
Drain (D)	Quick connector Coupler COF 100 1" BSP C 811200000
Power supply nominal	230 VAC 50Hz or 24 VDC
Power receptacle	IEC 60309; 16 A 3P (230 VAC) Harting Han; A Base Panel 1 (24 VDC)