

HydraWinch 50 CT

Features

- 50 mton winch, fitted in hoisting frame
- Both local and remote operation
- Wire length measurement, including zeroing function
- Bumpless shifting between CT and normal operation
- Fail safe band brake ensures safe operation
- Recommended CT max. is approx. 50% of max. line pull

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project




Guaranteed flexibility and high availability



Clear budget and manageable costs

Specifications HW50 CT

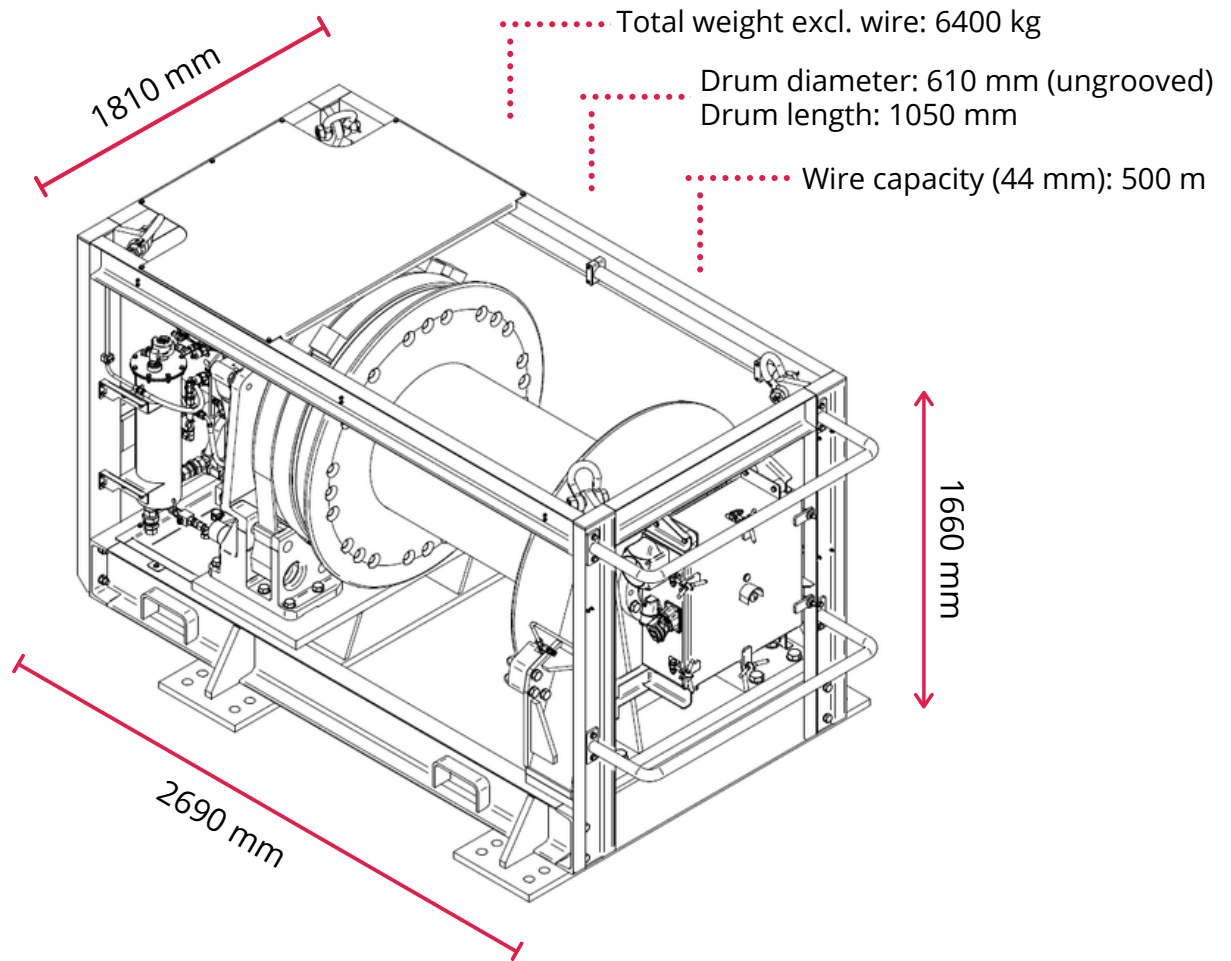

Max. line pull first layer	50 mton
Max. brake holding capacity	60 mton (first layer)
Max. speed first layer	9 m/min @ 200 l/min
Hydraulic supply	200 l/min / 280bar
Max. wire diameter	44 mm (not included)
Pressure (P)	SAE 1 1/2" - 6000#
Return oil (T)	SAE 1 1/2" - 6000#
Drain (D)	28L
Power supply nominal	230 VAC 50 Hz - 6A
Power receptacle	16 A, IEC 60309