



HydrauWinch 65ED

Features

- Both wired and wireless remote control
- Starting-up signaling
- Full crash frame and barrier protection
- Compact design with high performance
- Rebuilt w. DNV-GL / Lloyds and English LOLER and PUWER rules
- Built-on valves provided, no extra components needed

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Guaranteed flexibility and high availability




Maintenance during the project



Clear budget and manageable costs

Specifications HW65ED

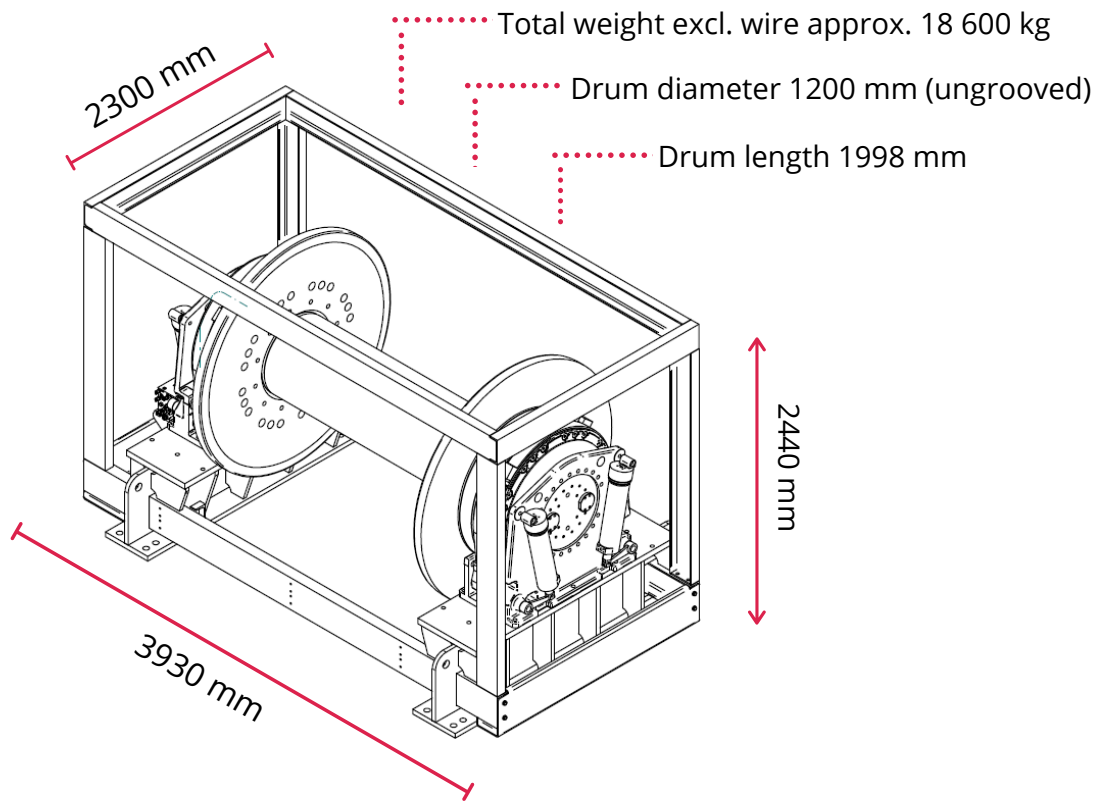

Max. line pull 1st layer	30 mton
Max. brake holding capacity	60 mton (1st layer)
Max. speed 1st layer	22,5 m/min @ 400 l/min
Hydraulic supply	400 l/min / 300 bar
Max. wire diameter	30 mm (not included)
Wire capacity (30 mm)	3100 m (in 10 layers)
Pressure (P)	SAE 1,5" - 6000#
Return oil (T)	SAE 2,5" - 6000#
Drain (D)	G 1"
Flush (F)	G 0,5"
Power supply nominal	230 VAC 50 Hz - 6A
Power receptacle	16 A, IEC 60309