

HydrauWinch U4PF CT

Features

- Umbilical winch
- Max. 4 hydraulic high pressure umbilical connections
- Directly driven by high torque hydraulic motor and additional control valves
- Constant tensioning
- Remote control
- Crash frame with integrated lifting lugs and forklift trays

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project




Guaranteed flexibility and high availability



Clear budget and manageable costs

Specifications HWU4PF CT

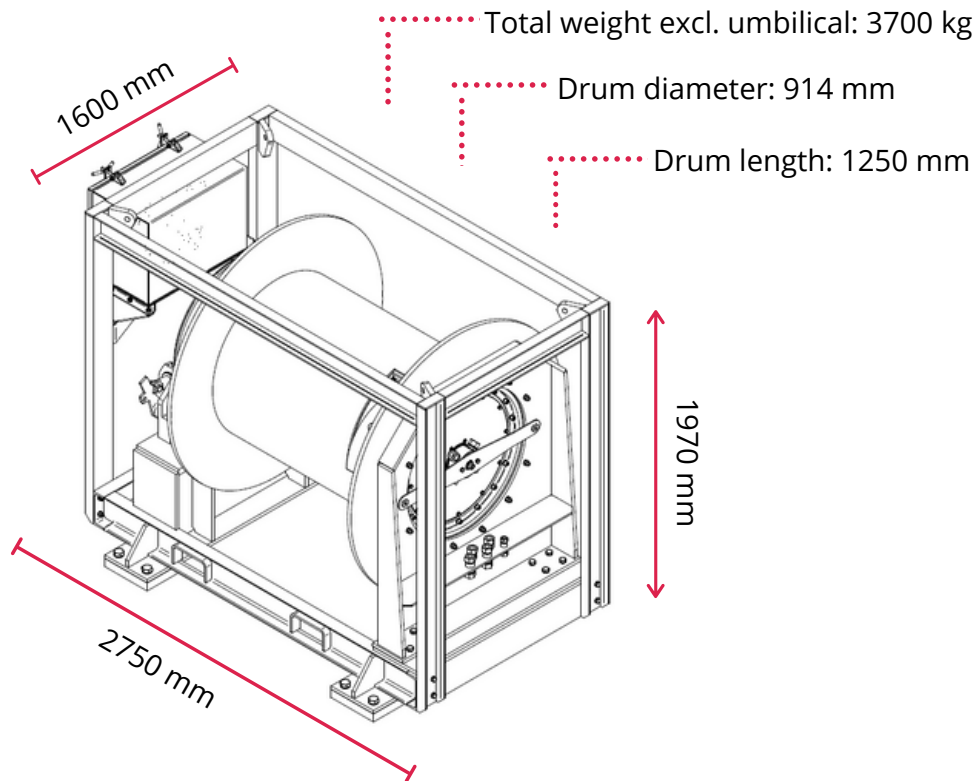

Max. line pull 1st layer	5 mton
Max. brake holding capacity	19 mton (1st layer)
Max. speed 1st layer	15 m/min @ 100 l/min
Hydraulic supply	120 l/min / 300 bar max.
Max. pressure umbilical	420 bar, including rotary coupling
Connections umbilical	4 x 1/2" or 3/4" with 25S connection
Drum shields diameter	1500 mm
Pressure	25S
Return/tank	28L
Drain	22L
LS	12S
High pressure	12S