



HydrauPack 450



Features

- Diesel driven hydraulic power unit
- Pump flow electronically controlled from 0-100%
- Open hydraulic circuit with electronic pressure and flow control
- Intelligent electronic control system
- Sound-insulated
- Electric transfer pump to fill hydraulic tank

Benefits

- 24/7** 24/7 (de)mobilisation, installation and commissioning
-  Maintenance during the project
-  Guaranteed flexibility and high availability
-  Clear budget and manageable costs

Specifications HP450

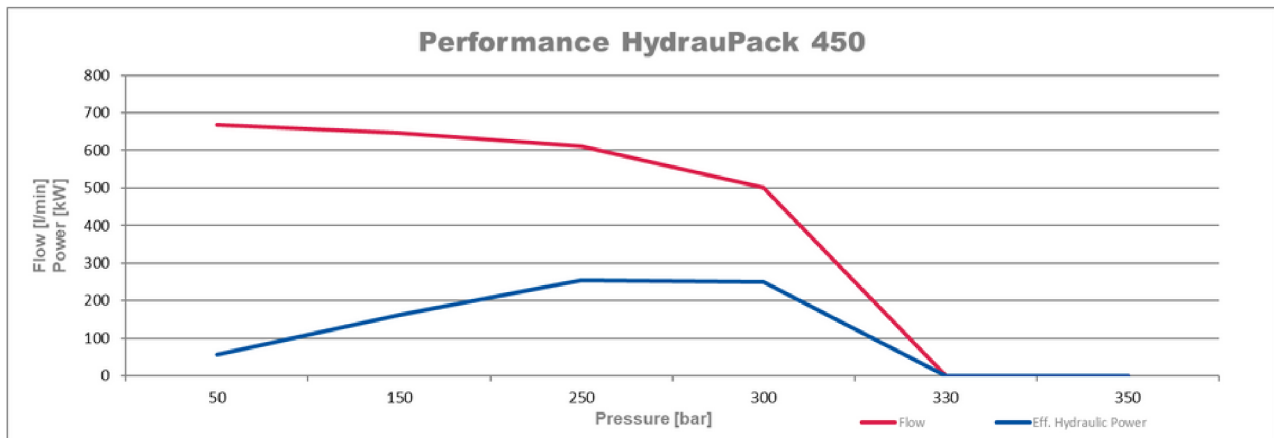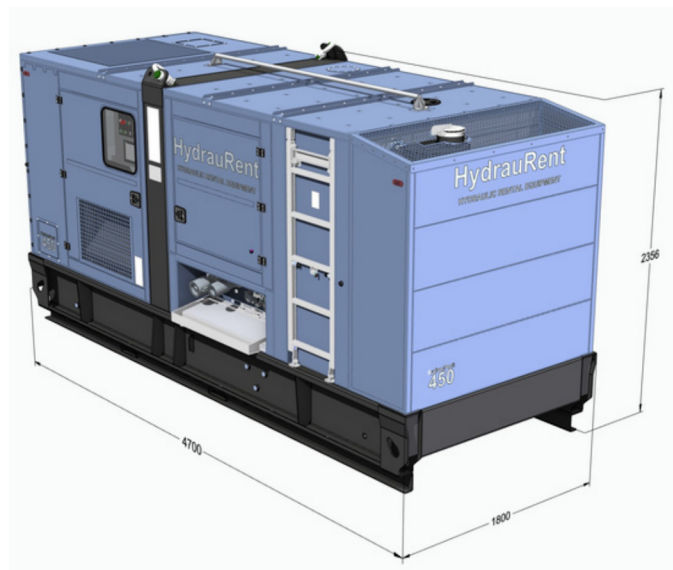

Specifications

Total weight incl. oil	7300	kg
Hydraulic oil tank capacity	1200	liter
Fuel tank capacity	700	liter
Operational temperature	-10 to +45	°C

Technical specifications

Max. working pressure	350	bar
Max. output flow	660	liter/min
Total engine power	391	kW @ 1800 rpm (25 °C)
Cooling capacity air/oil	90	kW @ ΔT = 25 °C
Hydraulic fluid	H(V)LP ISO VG 46	
Connection DOP Pressure (P)		Stucchi VOF200 2" BSP N (Nipple)
Connection DOP Tank (T)		Stucchi VOF200 2" BSP C (Coupler)
Connection DOP Drain (L)		Stucchi VOF100 1" BSP C (Coupler)
Connection Cutter Forward (A)		Stucchi VOF100 1" BSP N (Nipple)
Connection Cutter Reverse (B)		Stucchi VOF100 1" BSP N (Coupler)
Connection Cutter Drain (L)		Snap-tite VHC8-8RP (Coupler)