HydrauPack 55E

Features

- Open hydraulic circuit with pressure and load sense control
- Connection for electric remote control
- Lloyd's Register offshore certified acc. to DNV rules 2.7-1 CSC and EN12079 incl. rigging
- Combinable with other HP 55E units for higher output flow
- Integrated hydraulic oil circulation cooler
- Combinable with extra tank for higher oil tank volume

Benefits

24/7 24/7 (de)mobilisation, installation and commissioning

Maintenance during the project

Guaranteed flexibility and high availability

Clear budget and manageable costs

Specifications HP55E

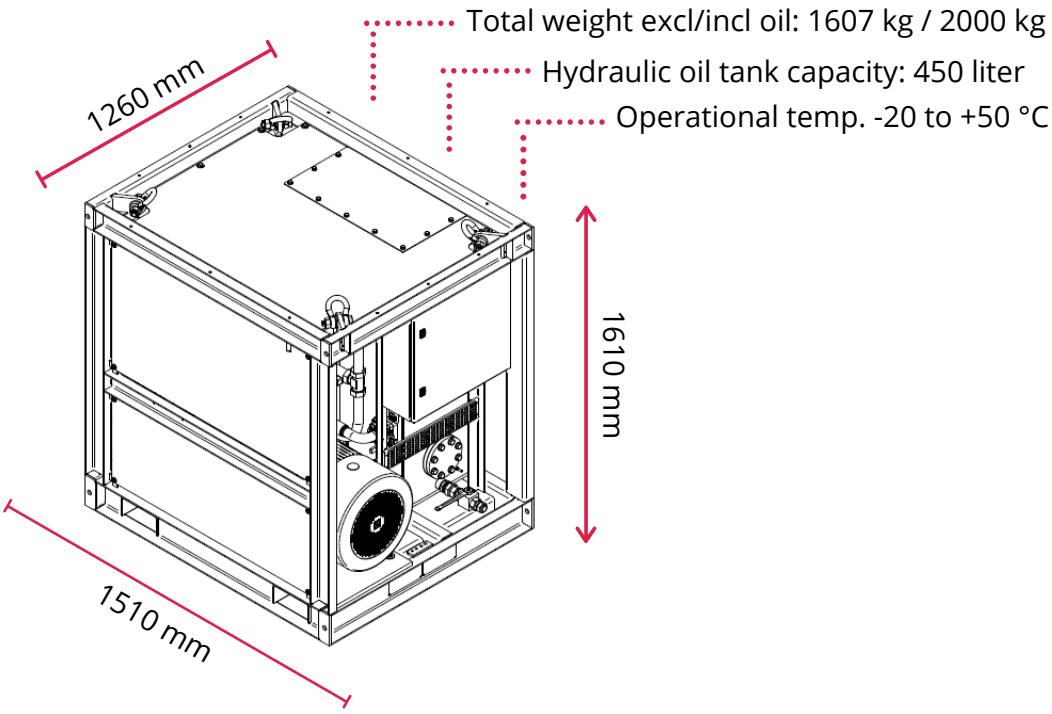

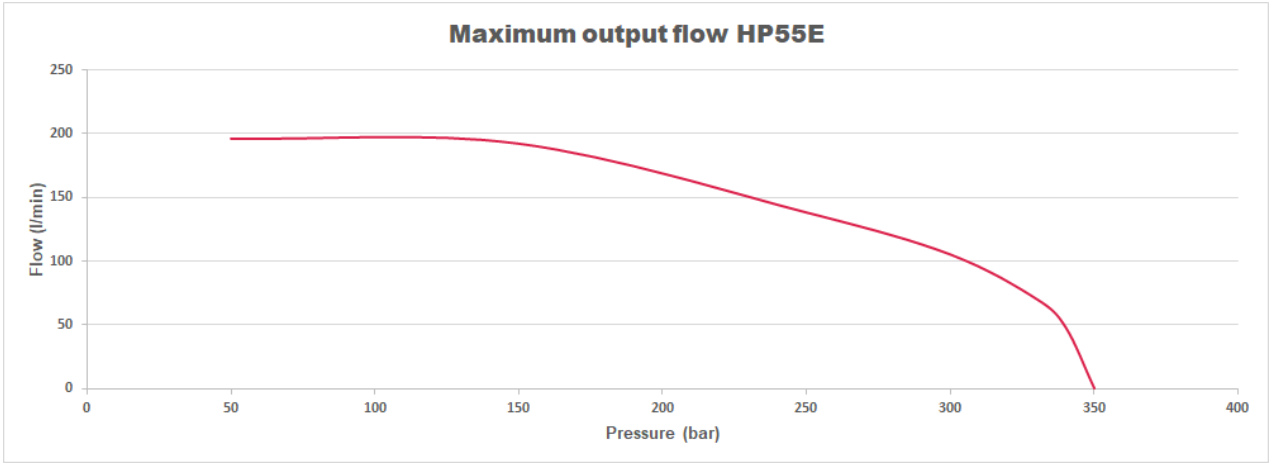

Max. working pressure main pumps	350 bar
Electric motor power	55 kW @ 400 VAC (50 Hz)
Electric motor power	63 kW @ 440 VAC (60 Hz)
Flush capacity	20-24 liter/min (50-60 Hz) @ 30 bar max
Hydraulic fluid	H(V)LP ISO VG 46, 68
Power supply nominal	400 VAC (50 Hz) - 105 A (3P + E)
Power supply nominal	440 VAC (60 Hz) - 110 A (3P + E)
Pressure (P)	QC 1" Snap-tite 75 N 16-16 RP
Return (T)	QC 1" Snap-tite 75 C 16-16 RP
Drain (D)	QC 3/4" Snap-tite 71-3 C 12-12 RP
Load sense (LS)	QC 1/2" Snap-tite 71-3 C 8-8 RP
Flush (F)	QC 1/2" Snap-tite 71-3 N 8-8 RP
Filling point	QC 1/2" flat face acc. ISO 16028 (male)
Included	Power connector on unit: 125A-6h, 5-pole